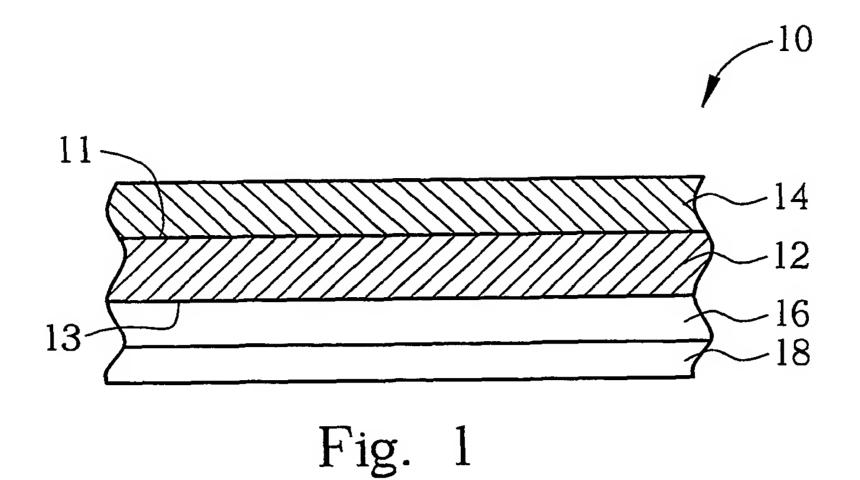
10/019645 PCT/US00/12537

on of break down voltages of composite insulting adhesive tapes with different thickness Comparison of

	Composite substrate	Breakdown voltage (KV)
	6μm Aluminum foil /2μm HM Adhesive /12μm PET	6.0
2	10μm Aluminum foil /3μm HM Adhesive /19μm PET	7.0
က	22μm Aluminum foil /3μm HM Adhesive /25μm PET	8.0
4	6μm AL /2μm HM /12μm PET 20μm DS /20m PE /12μm PET	4.0
5	6μm AL /2μm HM /12μm PET 20μm DS /20m PE /12μm PET	6.5
9	6μm AL /2μm HM /12μm PET 20μm DS /20m PE /12μm PET	6.5
7	20μm Polyethylene /9μm PET	6.0
∞	20μm Polyethylene /12μm PET	6.5
6	20μm Polyethylene /19μm PET	7.5
10	20μm Polyethylene /25μm PET	8.0
	20μm Polyethylene /50μm PET	13.0

DS: acrylic adhesive



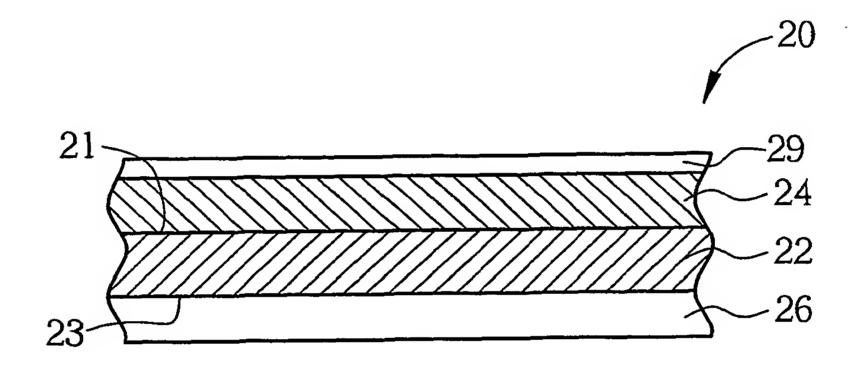
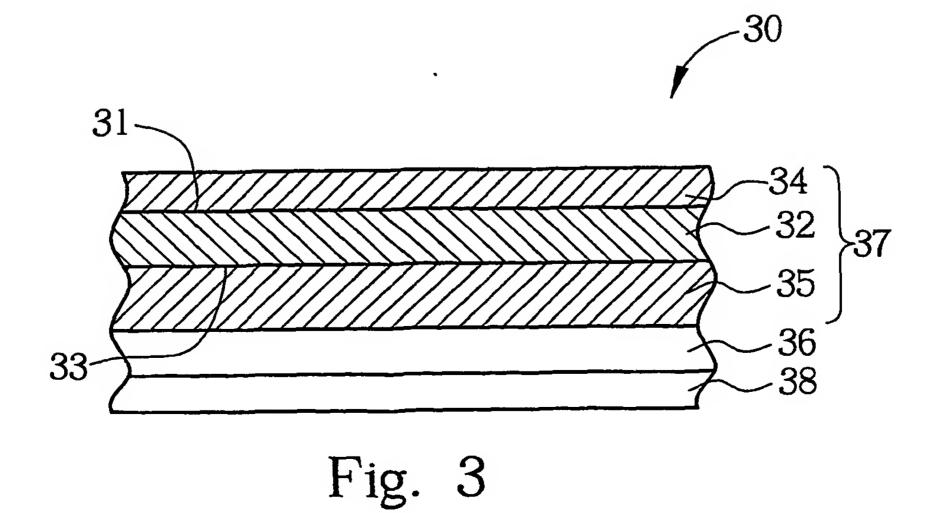



Fig. 2





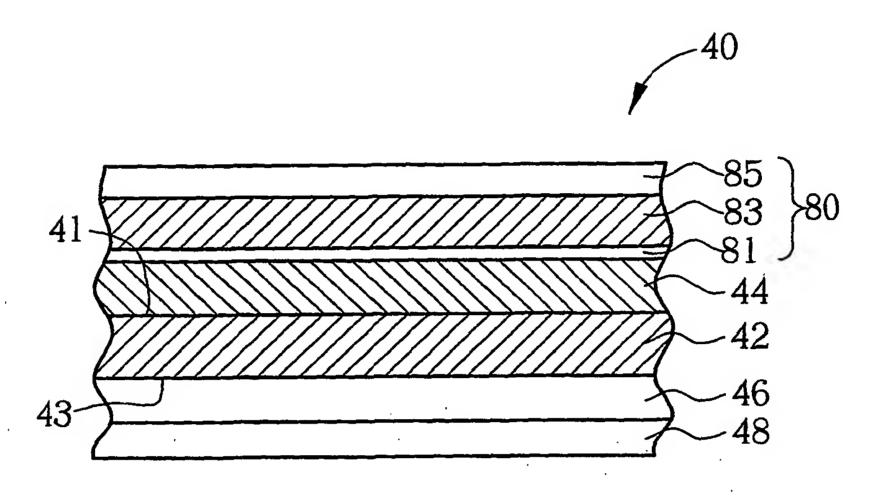


Fig. 4

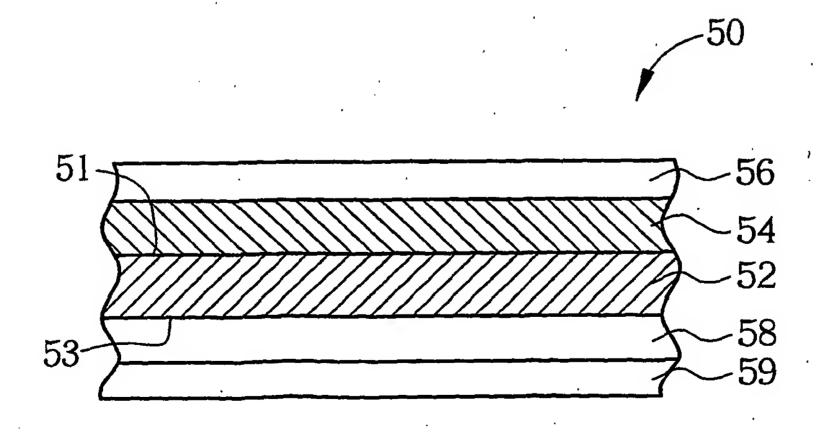


Fig. 5